

MAXIMUM PERMISSIBLE

ELEVATION 'C' & 'E'

2,640 LBS. TOTAL LOAD PER LEVEL U.D.L.

5,280 LBS. TOTAL LOAD PER BAY U.D.L.

(2) BEAM LEVELS ON 75" & 150" SPACING

ELEVATION 'F'

1,320 LBS. TOTAL LOAD PER LEVEL U.D.L.

2,640 LBS. TOTAL LOAD PER BAY U.D.L.

(2) BEAM LEVELS ON 75" & 150" SPACING

ELEVATION 'D'


TUNNEL BAY

2,640 LBS. TOTAL LOAD PER LEVEL U.D.L.

2,640 LBS. TOTAL LOAD PER BAY U.D.L.

(1) BEAM LEVEL ON 120" SPACING

WAREHOUSE LAYOUT

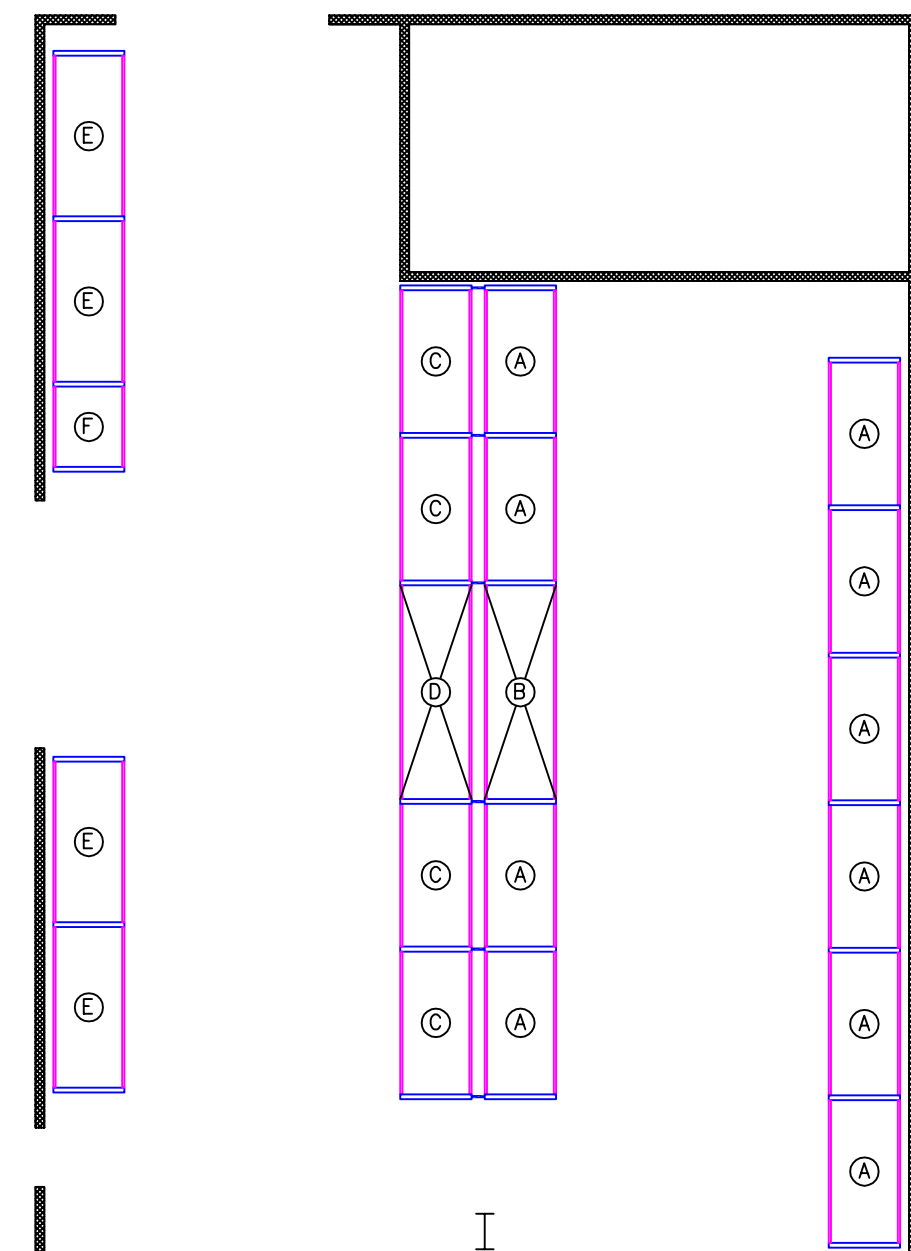

WARNING

The capacities shown above are based on new undamaged components. If damage occurs, unload affected area and replace damaged components.



SPACE **AID**
MANUFACTURING

A DIVISION OF M&P TOOL PRODUCTS

This rack installation is designed and constructed in conformance with **CSA-Standard A344.1-05/A344.2-05**

WWW.SPSPACEAIDMFG.COM